

SOLAR 180wv

Operating Weight: 17.600 ~ 18.500 kg

Bucket capacity (SAE): 0,34 ~ 0,91 m³

Engine Power: 112 kW (150 Hp) / 2.100 rpm



www.eurodaewoo.com

DAEWOO
Tracing the Way


Performance

This hydraulic excavator is equipped with the air-to-water intercooler engine, which has the greatest power output in its class and excellent fuel economy. It assures outstanding workability, productivity, and efficiency through the e-EPOS system, the new and improved version of EPOS System. This will assure increase in operating capacity and decrease in fuel consumption.



Joystick grip with 3 switches

Spare switches are installed on both joystick grips to control the additional attachment.

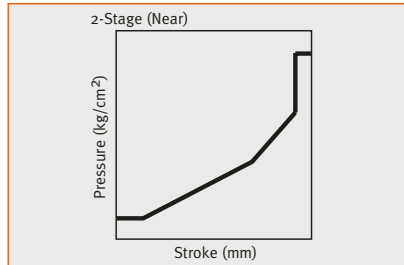

Improved manoeuvrability and control

New technologically advanced control valve and joystick valves have been installed to allow speedy, smooth and responsive control.



Air-to-water intercooler engine

Greatest power output and high-efficiency engine in its class.



Environmentally friendly, Green engine

This machine is equipped with the engine meeting the U.S. EPA Tier-II Regulations and European stage-II.



Excellent Reliability

Daewoo's world-class center for product reliability performs sophisticated testing on all completed products, to ensure they meet or exceed market standards.



360° fan guard

A metal mesh guard has been installed all around the fan blade to prevent accidental bodily injury.

Heat shield panel for turbo charger

The heat shield guard has been installed over the turbo charger to prevent the operator from inadvertently touching the hot surfaces while checking the engine area.



Working Environment

Wide operator cabin space meeting the ISO Standards and expanded all-round visibility. The low-noise, low-vibration type comfortable cabin provides the operator with safe and ergonomic operating environment.




The handle with tilting function

Because the handle with tilting function can be adjustable forward & backward according to operator's figure & location. The best operation & always minimum operator's fatigue in the optimum condition.

Increased foot space

Instruments, controls, and accessories have been ergonomically located in the cabin and 300mm seat slide has been achieved to provide ample space for operator's feet and legs.




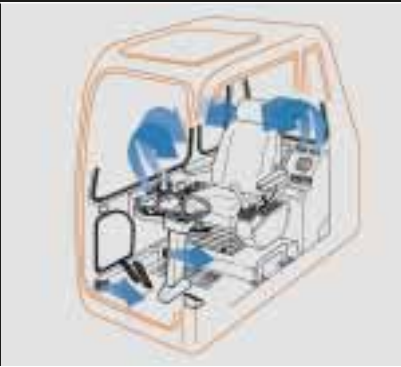

Fresh Air Type Air Conditioner

One touch selector switch for the air conditioner and heater output, featuring a multivalent circulation system that allows for greater cooling / heating performance. Improved front window defroster system has been added to provide enhanced clarity and visibility during any working condition.

- Easy replaceable air filter
- Larger cool air intake vents
- Industry standard fresh air/recirculation control system incorporated
- Modular electric fan condenser compartment

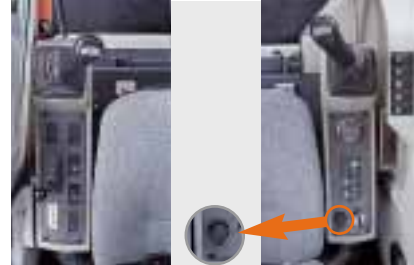

Cup holder


A folding style cup holder has been installed in the cabin allowing the operator to easily store a can or cup.

12 V Spare Power Socket

This socket can be used for charging a cellular phone or powering a small 12 V DC electrical device.

Low Vibration Cab Mounting System

By using a total isolating seal design (full sealing) outside noise has been drastically reduced to the levels comparable to that in a modern car. A viscous sealed mounting system has been incorporated, and the frame, cabin and seat have been designed to absorb major and minor vibrations, resulting in a significant decrease in vibration felt by the operator.

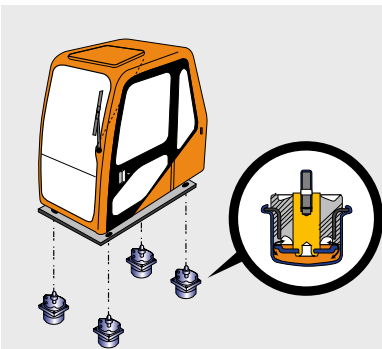

Long wind shield wiper blade

Front visibility is further improved by using the lengthened wiper blade.

Large ceiling cover

The ceiling cover can be opened to confirm the bucket operation even at the maximum excavating height.



Maintenance

Quick and easy service checks, maximizing the excavator's life expectancy.



Water separator

The transparent glass water separator is mounted at a location easily accessible from the ground allowing easy maintenance of the fuel system.



Electrical control access box

Pull-out style drawer for electrical control access box allows for easy service and maintenance.




PC monitoring function (SMS)

By connecting a laptop PC to the controller (e-EPOS controller) of the machine, data such as pump pressure and engine RPM can be displayed graphically. Also other various machine status data can be stored in memory and printed out using a printer.



Large fuel tank

The fuel tank with 280 liter capacity has been mounted to increase filling up interval.

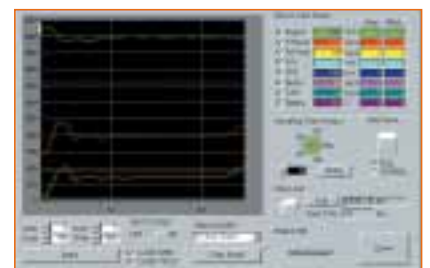

All range fuel level gauge

The fuel level gauge which shows the fuel through all range is installed on the side of the fuel tank.

Engine oil drain valve

The engine oil drain valve with quick coupler provides fast and environmentally sound serviceability.



GRAPHIC DISPLAY LCD MONITOR PANEL

The information monitor panel displays both text and symbols for easy recognition of machine status and various other data.

SIMPLIFIED OPERATION MODE SELECTION

The 3 work modes from the previous models have been reduced to digging and trenching modes for easy selection.

Digging Mode :



General Excavating, Ground Leveling, Loading Dump Truck, allows for versatility.

Trenching Mode :

trenching or excavating of side wall, operations which require heavy swing work.

Filter / oil operating hour display

The hours in use for 9 filters and oils can be displayed so that replacement intervals can be easily recognized.

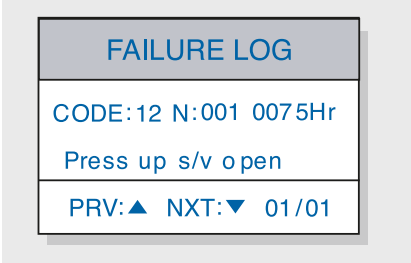

Self-diagnosis and fault history memory functions

Current faults and past faults history of the excavator control system are displayed and memorized on a real-time basis to enable correct diagnosis and quick repair.



Real-time clock with day / date

The real-time clock displays date and day in easy to read format.





Multiple language display

The user menu can be displayed in multiple languages for the operator's convenience.

Real-time machine data display

Displays 28 different machine status data and information such as pump delivery pressure and engine RPM.



Technical Data



ENGINE

MODEL

DAEWOO DB58TIS

TYPE

Water-cooled, 4-cycle, 6-cylinder in line, direct injection chamber type diesel engine. Air-to-water intercooler.

RATED FLYWHEEL HORSE POWER

DIN 6271, net	112 kW (152 Ps)
	at 2.100 rpm
SAE J1349, net	112 kW (150 Hp)
	at 2.100 rpm

PISTON DISPLACEMENT

5.785 cc

MAXIMUM TORQUE

55 kgf.m (540 Nm) at 1.500 rpm

BORE AND STROKE

102 x 118 mm

STARTING SYSTEM

24 V electric motor

BATTERIES

2 x 12 V x 100 Ah

AUTO-IDLE SYSTEM

Engine rpm is reduced automatically to the low idle rpm after a lapse of approx. 4 seconds with all control levers in neutral position, thus saving energy and reducing noise.



HYDRAULIC SYSTEM

Daewoo's e-EPOS (Electronic Power Optimizing System) can achieve maximum job efficiency and reduce fuel consumption.

- 2-power mode working system
- 2-Working mode selection system
- Computer aided engine pump control
- Hydraulic system assures fully independent and combined operations
- Cross-sensing and fuel saving pump system
- Auto idle system
- 2 speed travel system for high traction force and travel speed
- Travel motor brake torque-up system.
- Cruise travel system

MAIN PUMPS

2 variable displacement axial piston pumps.

Max. oil flow 2 x 164 l/min

PILOT PUMP

Gear pump
Max. oil flow 19,4 l/min
Pressure setting 39 bar

BRAKE PUMP

Gear pump
Max. oil flow 17,2 l/min
Pressure setting 157 bar

STEERING PUMP

Gear pump
Max. oil flow 47 l/min
Pressure setting 193 bar

MAIN RELIEF VALVES

Boom/Arm/Bucket 343 bar
Travel circuit 343 bar

OVERLOAD RELIEF VALVES

Boom circuit 353 bar
Arm circuit 353 bar
Bucket circuit 353 bar

SWING MOTOR RELIEF VALVE

275 bar



HYDRAULIC CYLINDERS

High-strength piston rods and tubes are used. Cylinder cushion mechanism is provided for boom, articulated boom. Arm and bucket cylinders to assure shock-free operation and extend life of cylinder.

MONO BOOM

Cylinders	Q'ty	Bore x Rod dia. x Stroke
Boom	2	115 x 80 x 1.195 mm
Arm	1	125 x 90 x 1.450 mm
Bucket	1	110 x 75 x 1.025 mm

ARTICULATED BOOM

Cylinders	Q'ty	Bore x Rod dia. x Stroke
Boom	2	115 x 80 x 1.032 mm
Arti.Boom	1	200 x 130 x 639 mm
Arm	1	125 x 90 x 1.450 mm
Bucket	1	110 x 75 x 1.025 mm



SUPER-STRUCTURE REVOLVING FRAME

A deep, full-reinforced box section. Heavy-gauge steel plates used for ruggedness.



OPERATOR'S CAB

Independent, shock and noise-free roomy ISO standard operator's cab. 4 side safety glass windows give all-round visibility. Front window slides up and stores in the roof. Left and right side windows opens for ventilation. Fully adjustable reclining seat fwd./rev. and up/down. Cab cooler is optionally available.



CONTROLS 2 IMPLEMENT LEVERS

Pilot pressure control type. Right lever is for boom and bucket control, left lever for swing and arm control. Left rear lever is for dozer and outrigger. Left bottom pedal is for articulated boom.


NOISE LEVELS (DYNAMIC VALUE)

LwA external noise:

102 dB (A) (2000/14/EU)

LpA operator noise:

74 dB (A)

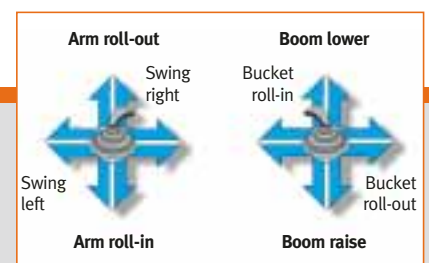



SWING MECHANISM

High-torque, axial piston motor with planetary reduction gear bathed in oil. Swing circle is a single-row, shear type ball bearing with induction-hardened internal gear. Internal gear and pinion immersed in lubricant. Swing reactionless valve is internally attached. Spring applied hydraulically released parking brake.

A swing lock clamps the superstructure for transportation.

SWING SPEED

0 to 12 rpm

REAR SWING RADIUS

2.450 mm



DRIVE

Fully hydrostatic driven, 2 speed power shift transmission, variable displacement, high torque, axial piston motor, foot pedal controls provide smooth travel, hub reduction type front steering axle and rear rigid axle.

TRAVEL SPEED

0 to 32 km/h

A maximum speed restriction of 20 km/h is available as an option.

MAXIMUM TRACTIVE FORCE

Force 10.510 kgf

Gradeability 34,3° (68,2%) continuous



UNDERCARRIAGE

Heavy-duty frame, all-welded stress-relieved structure. Top grade materials used for toughness. Specially heat-treated connecting pins. 10.00-20-14PR(OTR) double tires with tire spacer.



BRAKE

Full sealed wet discs service brakes operated fully hydraulic and full sealed wet discs parking brake operated hydraulically.



WEIGHT

MAJOR COMPONENT WEIGHT (KG)

Mono boom : 5.150 mm (including cylinders and links)	1.750
Arti boom (including cylinders and links)	2.350
Arm : 2.100 mm	537
Arm : 2.600 mm	584
Arm : 3.100 mm	639
Dozer blade (including cylinders)	900
Outriggers (including cylinders & frame)	1.050

EXAMPLES OF WEIGHT (10% FUEL INCLUDED)

Mono boom (5.150 mm) - Arm (2.600 mm) - Bucket 0,76 m³ SAE - Front dozer - Rear outriggers	17.700 kg
Mono boom (5.150 mm) - Arm (2.600 mm) - Bucket 0,76 m³ SAE - Front and rear outriggers	17.850 kg
Arti boom - Arm (2.600 mm) - Bucket 0,76 m³ SAE - Front dozer - Rear outriggers	18.300 kg



SERVICE REFILL CAPACITIES (liters)

Fuel tank	280
Cooling system	49

LUBRICATION

Engine oil	20,5
Swing drive	5
Final drive	4 x 2
Hydraulic tank	132
Transmission	3,8
Front axle case	8,5
Rear axle case	11



BUCKETS

CAPACITY		WIDTH		WEIGHT	RECOMMENDATION		
SAE, heaped	CECE, heaped	Without side cutters	With side cutters		2,2 m Arm	2,6 m Arm	3,1 m Arm
0,34 m³	0,31 m³	564 mm	650 mm	415 kg	A	A	A
0,45 m³	0,40 m³	692 mm	778 mm	456 kg	A	A	A
0,57 m³	0,51 m³	842 mm	928 mm	518 kg	A	A	A
0,70 m³	0,61 m³	984 mm	1.070 mm	584 kg	A	A	B
0,76 m³	0,66 m³	1.054 mm	1.140 mm	611 kg	A	A	B
0,81 m³	0,70 m³	1.058 mm	1.168 mm	692 kg	A	B	C
0,91 m³	0,80 m³	1.180 mm	1.290 mm	733 kg	B	B	C


A. Suitable for materials with density of 2.000 kg/m³ or less

B. Suitable for materials with density of 1.600 kg/m³ or less


C. Suitable for materials with density of 1.100 kg/m³ or less

Undercarriage


UNDERCARRIAGE WITH FRONT OUTRIGGERS AND REAR DOZER

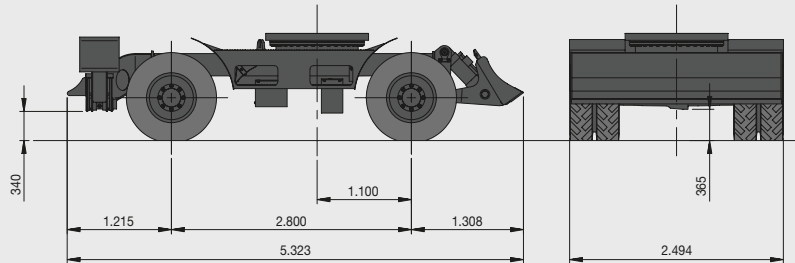

UNDERCARRIAGE WITH 2 SETS OF OUTRIGGERS

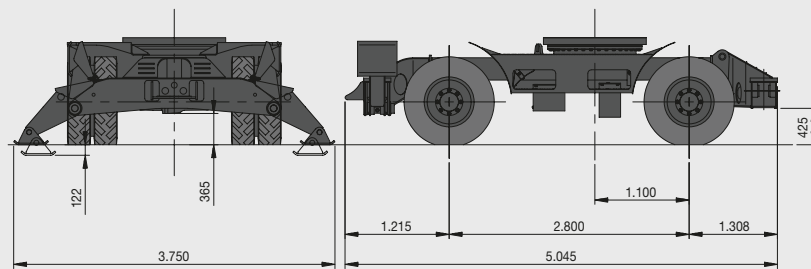

UNDERCARRIAGE WITH FRONT DOZER AND REAR OUTRIGGERS

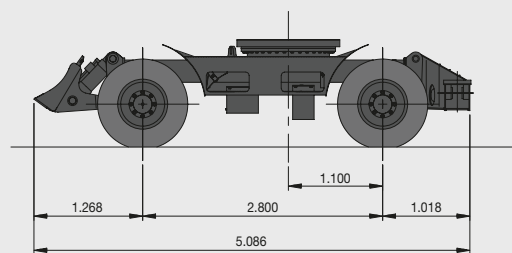

SOLAR 180 WV

Standard & Optional Equipment

STANDARD EQUIPMENT

HYDRAULIC SYSTEM

- Boom and arm flow regeneration
- Boom and arm holding valves
- Swing anti-rebound valves
- Spare ports (valve)
- One-touch power boost
- Piping for hammer (one way)

CABIN & INTERIOR

- Viscous cab mounts
- All weather sound suppressed type cab
- Air conditioner
- Adjustable suspension seat with head rest and adjustable arm rest
- Pull-up type front window and removable lower front window
- Room light
- Intermittent windshield wiper
- Cigarette lighter and ashtray
- Cup holder
- Hot & cool box
- Graphic display monitor
- Fuel control dial
- AM/FM Radio and cassette player
- Remote radio ON/OFF switch
- 12 V spare power socket
- Serial communication port for laptop PC interface
- Joystick lever with 3 switches

SAFETY

- Large handrails and step
- Punched metal anti-slip plates
- Seat belt
- Hydraulic safety lock lever
- Safety glass
- Hammer for emergency escape
- Right and left rearview mirrors
- Boom and arm hose rupture protection valve

OTHERS

- Double element air cleaner
- Pre-cleaner
- Water separator
- Dust screen for radiator
- Engine overheat prevention system
- Engine restart prevention system
- Self-diagnostic system
- Alternator (24 V, 50 A)
- Electric horn
- Halogen working lights (frame mounted 2, boom mounted 2)
- Electric fuel supply pump
- Front dozer blade
- Rear stabilizer

OPTIONAL EQUIPMENT

SAFETY

- Overload warning device
- Cabin Top/Front guard (FOGS standard)
- Travel alarm
- Travel & swing alarm
- Rotating beacon

CABIN & INTERIOR

- Sunvisor
- Sun roof

OTHERS

- Piping for rotation
- Double fuel filter
- Additional work lights on the cabin
 - 2 front lamps
 - 4 front and 2 rear lamps
- Large capacity alternator (24 V, 80 A)
- Rear dozer blade
- Front stabilizer

Boom and arm hose rupture protection valve



Sunvisor



Additional work lights on the cabin



Electric fuel supply pump




Rotating beacon



Dimensions & Working Ranges


Mono Boom

DIMENSIONS

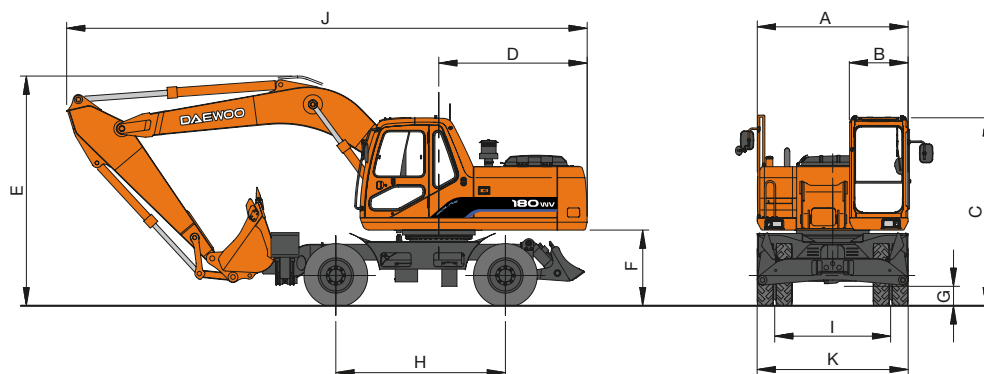

A	Overall width of upper structure	2.490 mm
B	Overall width of cab	960 mm
C	Overall height of cab	3.103 mm
D	Tail swing radius	2.450 mm
E	Overall height of boom	
	Arm length (3,1 m)	3.975 mm
	Arm length (2,6 m)	3.795 mm
	Arm length (2,2 m)	3.795 mm
F	Clearance under counterweight	1.249 mm
G	Ground clearance	340 mm
H	Wheel base	2.800 mm
I	Tread	1.914 mm
J	Overall length	
	Arm length (3,1 m)	8.595 mm
	Arm length (2,6 m)	8.595 mm
	Arm length (2,2 m)	8.595 mm
K	Overall tire width with fender	
	10.00-20-14PR Double tire	2.496 mm

WORKING RANGES

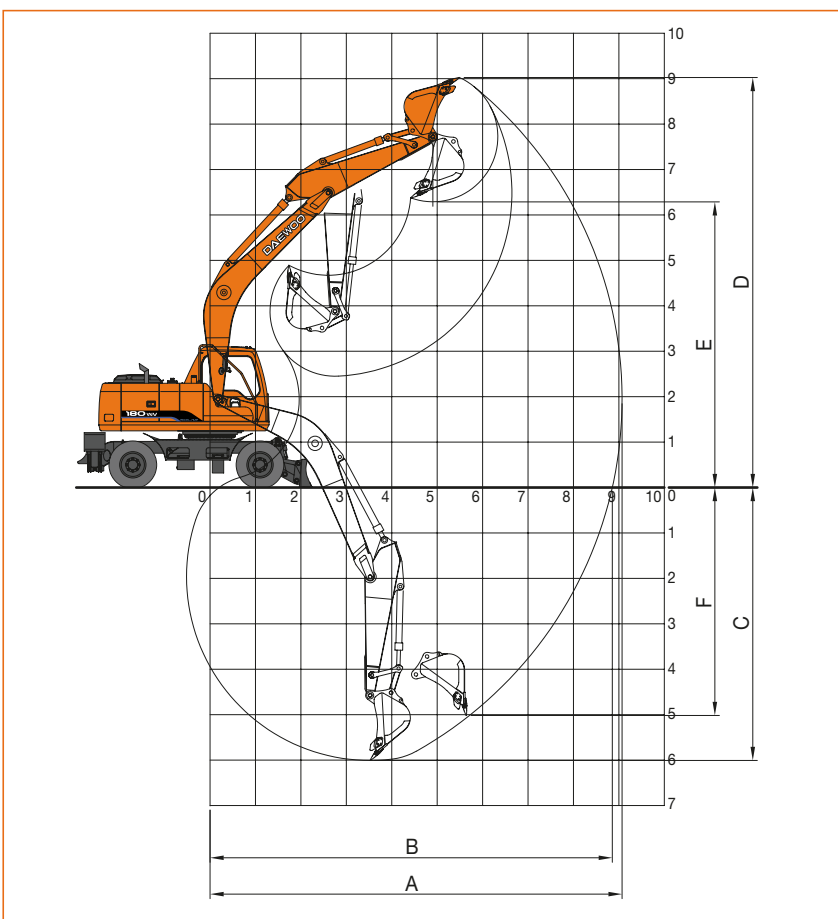

DIGGING FORCES (SAE)

		3,1 m	2,6 m	2,2 m
			(standard)	
Bucket digging force *	kgf	11.200	11.200	11.200
	kN	110	110	110
Arm digging force *	kgf	8.200	9.200	10.600
	kN	80	90	104

* At power boost


Boom length (5,150 m)

Arm length	3.100 mm	2.600 mm (standard)	2.200 mm
------------	----------	------------------------	----------

A. Max. digging reach	9.509 mm	9.071 mm	8.732 mm
B. Max. digging reach at ground level	9.304 mm	8.855 mm	8.507 mm
C. Max. digging depth	6.506 mm	6.006 mm	5.657 mm
D. Max. digging height	9.197 mm	9.026 mm	8.821 mm
E. Max. dumping height	6.464 mm	6.289 mm	5.999 mm
F. Max. vertical wall digging depth	5.494 mm	5.019 mm	4.554 mm

ARTICULATED BOOM

DIMENSIONS

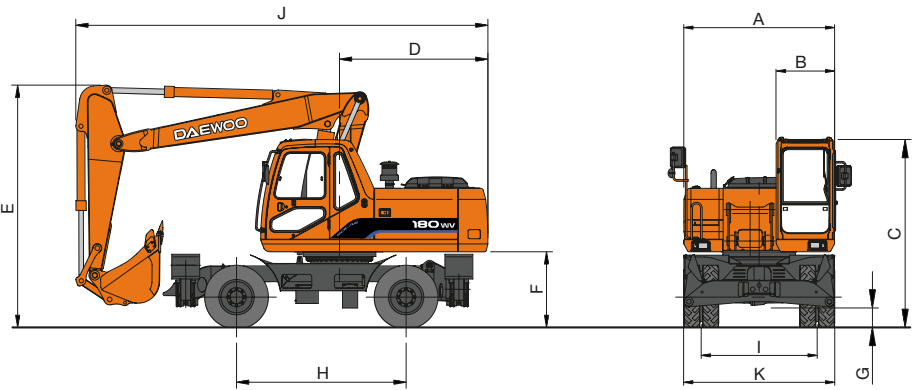

A	Overall width of upper structure	2.490 mm
B	Overall width of cab	960 mm
C	Overall height of cab	3.103 mm
D	Tail swing radius	2.450 mm
E	Overall height of boom	
	Arm length (2,6 m)	4.000 mm
	Arm length (2,2 m)	4.000 mm
F	Clearance under counterweight	1.249 mm
G	Ground clearance	340 mm
H	Wheel base	2.800 mm
I	Tread	1.914 mm
J	Overall length	
	Arm length (2,6 m)	6.805 mm
	Arm length (2,2 m)	6.805 mm
K	Overall tire width with fender	
	10.00-20-14PR Double tire	2.496 mm


DIGGING FORCES

(MAXIMUM RADIAL TOOTH FORCES)

		2,6 m	2,2 m
Bucket digging force *	kgf	11.200	11.200
	kN	110	110
Arm digging force *	kgf	9.200	10.600
	kN	90	104

* At power boost

WORKING RANGES

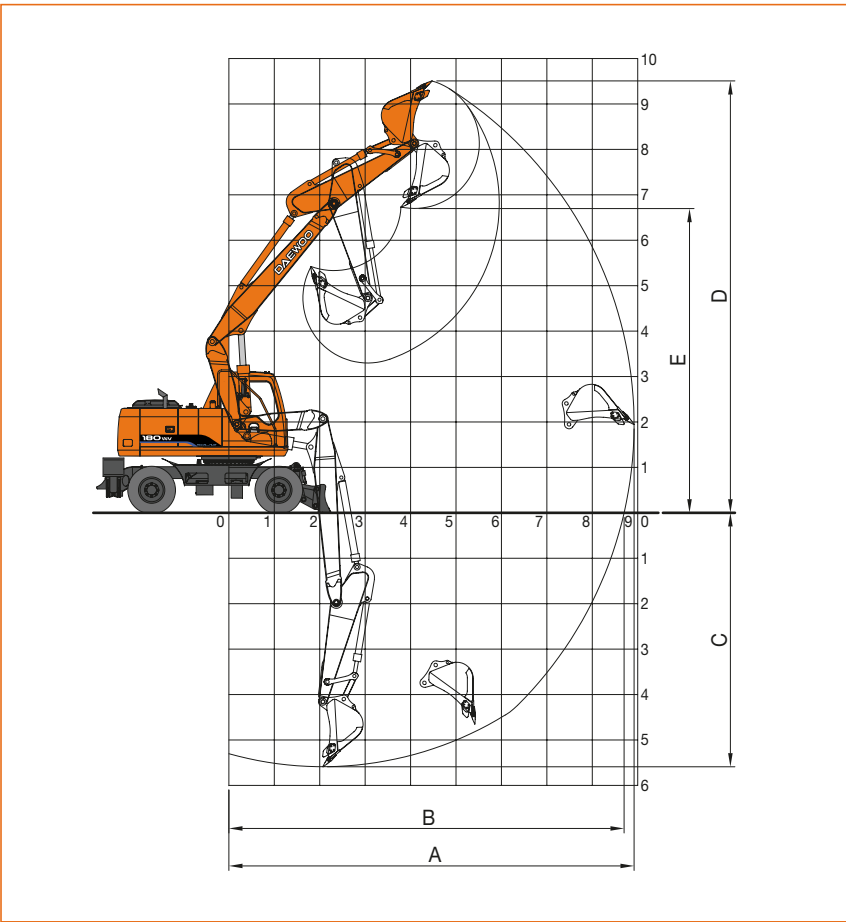


Boom length (Lower boom 1,90 m - Upper boom 4,050 m)			
Arm length		2.600 mm	2.200 mm
A. Max. digging reach		9.326 mm	8.921 mm
B. Max. digging reach at ground level		9.116 mm	8.701 mm
C. Max. digging depth		6.000 mm	5.591 mm
D. Max. digging height		9.826 mm	9.507 mm
E. Max. dumping height		7.005 mm	6.697 mm

Lifting Capacities

Mono Boom

STANDARD

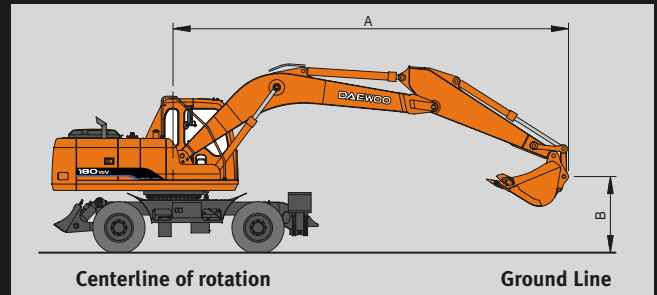

Boom : 5,15 m

Arm : 2,6 m

Bucket : SAE 0,76 m³ (CECE 0,66 m³)

Unit : 1.000 kg

Lifting conditions : Free on wheels / Dozer blade or Outriggers on ground

A(m)	2	3	4	5	6	7	8	Max. Reach	A(m)
B(m)									
6					*3,51/*3,95	2,59/*3,95			*2,55/*2,83
5					*3,68/*4,14	2,54/*4,14	*3,01/*3,33	1,90/*3,33	*2,59/*2,88
4				*4,38/*4,91	3,36/*4,91	*4,00/*4,50	2,47/*4,50	3,66/*4,25	1,88/*3,95
3		*8,59/*9,57	7,09/*9,57	*6,22/*6,95	4,54/*6,95	*5,07/*5,69	3,20/*5,69	*4,41/*4,96	2,37/*4,96
2		*8,83/*9,78	6,50/*9,78	*7,43/*8,29	4,25/*8,29	*5,78/*6,47	3,04/*6,47	4,57/*5,44	2,27/*4,91
1		*6,70/*7,44	6,19/*7,44	*8,30/*9,26	4,04/*9,26	6,03/*7,11	2,90/*6,48	4,46/*5,85	2,19/*4,81
0	*3,87/*4,34	*3,87/*4,34	*7,53/*8,35	6,08/*8,35	*8,72/*9,74	3,91/*9,37	5,91/*7,51	2,81/*6,36	4,39/*5,12
-1	*6,00/*6,67	*6,00/*6,67	*9,39/*10,39	6,07/*10,39	*8,66/*9,78	3,86/*9,30	5,85/*7,62	2,76/*8,30	4,35/*5,19
-2	*8,29/*9,17	*8,29/*9,17	*11,11/*12,40	6,11/*12,40	*8,41/*9,40	3,87/*9,31	5,84/*7,41	2,75/*6,30	4,34/*5,98
-3	*11,01/*12,14	*11,01/*12,14	*9,94/*11,11	6,21/*11,11	*7,65/*8,57	3,92/*8,57	5,89/*6,77	2,78/*6,34	
-4	*10,83/*12,15	*10,83/*12,15	*8,11/*9,10	6,36/*9,10	*6,30/*7,08	4,02/*7,08			

OPTION

A(m)	2	3	4	5	6	7	8	Max. Reach	A(m)
B(m)									
6					*3,80/*4,19	2,53/*4,19			*3,50/*3,87
5				*4,15/*4,65	3,43/*4,65	*3,94/*4,43	2,49/*4,43		*3,59/*3,96
4			*5,48/*6,13	4,73/*6,13	*4,70/*5,26	3,29/*5,26	*4,23/*4,76	2,42/*4,76	3,62/*4,43
3		*9,56/*10,65	6,80/*10,65	*6,68/*7,47	4,41/*7,47	*5,36/*6,00	3,13/*6,00	*4,61/*5,18	2,32/*4,98
2			*7,78/*8,69	4,13/*8,69	*6,00/*6,72	2,97/*6,57	4,52/*5,61	2,23/*4,87	3,50/*4,92
1		*5,98/*6,65	*5,98/*6,65	*8,49/*9,48	3,94/*9,41	5,96/*7,27	2,84/*6,41	4,42/*5,96	2,15/*4,77
0		*7,78/*8,62	6,00/*8,62	8,65/*9,77	3,85/*9,29	5,86/*7,56	2,76/*6,31	4,36/*6,16	2,09/*4,71
-1	*6,85/*7,59	*6,85/*7,59	*10,42/*11,52	6,02/*11,52	*8,61/*9,63	3,82/*9,25	5,82/*7,56	2,73/*6,27	4,33/*6,13
-2	*9,74/*10,59	*9,74/*10,59	*10,53/*11,76	6,09/*11,76	*8,12/*9,09	3,85/*9,09	5,83/*7,20	2,74/*6,29	4,34/*5,77
-3	*12,13/*13,58	*12,13/*13,58	*9,18/*10,28	6,22/*10,28	*7,18/*8,06	3,92/*8,06	*5,65/*6,35	2,80/*6,35	
-4	*9,02/*10,16	*9,02/*10,16	*7,06/*7,94	6,42/*7,94	*5,49/*6,20	4,07/*6,20			

Boom : 5,15 m — Arm : 3,1 m — Bucket : SAE 0,57 m³ (CECE 0,51 m³)

A(m)	2	3	4	5	6	7	8	Max. Reach	A(m)
B(m)									
7									*2,19/*2,45
6							*2,47/*2,74	2,03/*2,74	
5						*3,36/*3,78	2,66/*3,78	*3,25/*3,60	2,01/*3,60
4						*3,71/*4,17	2,58/*4,17	*3,54/*3,99	1,96/*3,99
3			*5,57/*6,62	4,73/*6,62	*4,68/*5,25	3,33/*5,25	*4,15/*4,66	2,47/*4,66	3,69/*4,29
2		*9,77/*10,89	6,78/*10,89	*6,87/*7,67	4,41/*7,67	*5,44/*6,09	3,15/*6,09	*4,62/*5,19	2,36/*5,01
1		*8,45/*9,35	6,33/*9,35	*7,92/*8,84	4,14/*8,84	*6,11/*6,84	2,98/*6,58	4,54/*5,67	2,26/*4,89
0	*4,05/*4,52	*4,05/*4,52	*7,98/*8,84	6,12/*8,84	*8,56/*9,56	3,97/*9,44	5,98/*7,37	2,86/*6,43	4,45/*6,03
-1	*5,62/*6,24	*5,62/*6,24	*9,07/*10,03	6,05/*10,03	8,68/*9,82	3,89/*9,32	5,89/*7,63	2,79/*6,34	4,39/*6,21
-2	*7,43/*8,22	*7,43/*8,22	*11,00/*12,14	6,06/*12,14	8,65/*9,67	3,86/*9,29	5,85/*7,58	2,76/*6,31	4,36/*6,16
-3	*9,60/*10,59	*9,60/*10,59	*10,73/*11,98	6,12/*11,98	*8,13/*9,09	3,89/*9,09	5,87/*7,18	2,78/*6,32	4,38/*5,77
-4	*12,33/*13,59	*12,33/*13,59	*9,25/*10,36	6,25/*10,36	*7,11/*7,97	3,97/*7,97	*5,61/*6,25	2,84/*6,25	
-5	*9,23/*10,39	*9,23/*10,39	*6,89/*7,75	6,47/*7,75	*5,24/*5,91	4,13/*5,91			

Note 1. Ratings are based on SAE J1097

2. Load point is the hook on the back of the bucket

3. * = Rated loads are based on hydraulic capacity

4. Rated loads do not exceed 87% of hydraulic capacity or 75% of tipping capacity



: Rating over front




: Rating over side or 360 degree



: Ground

ARTICULATED BOOM

STANDARD

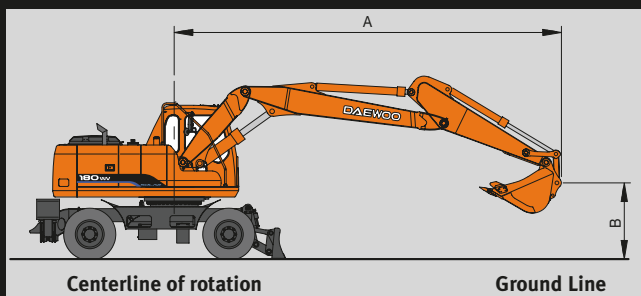

Arti boom

Arm : 2,2 m

Bucket : SAE 0,76 m³ (CECE 0,66 m³)

Unit : 1.000 kg

Lifting conditions : Free on wheels / Dozer blade or Outriggers on ground

A(m)	2	3	4	5	6	7	8	Max. Reach	
									A(m)
B(m)									
7				*2,28/*2,60	*2,28/*2,60			*2,68/*3,04	*2,68/*3,04
6				*2,38/*2,71	*2,38/*2,71	*2,73/*3,10	2,62/*3,10	*2,92/*3,31	2,27/*3,34
5				*2,81/*3,19	*2,81/*3,19	*2,93/*3,32	2,57/*3,32	*3,15/*3,56	1,92/*3,56
4		*4,95/*5,56	*4,95/*5,56	*3,93/*4,43	*3,93/*4,43	*3,50/*3,96	3,37/*3,96	*3,33/*3,76	2,49/*3,76
3				*5,46/*6,13	4,47/*6,13	*4,37/*4,92	3,19/*4,92	*3,86/*4,35	2,39/*4,35
2				*6,99/*7,83	4,17/*7,83	*5,29/*5,94	3,02/*5,94	*4,45/*5,01	2,28/*4,97
1				*8,20/*9,17	3,98/*9,17	6,08/*6,86	2,89/*6,53	4,52/*5,64	2,19/*4,87
0				*6,35/*7,05	6,04/*7,05	8,78/*10,06	3,88/*9,42	5,97/*7,60	2,80/*6,42
-1	*5,95/*6,61	5,95/*6,61	*9,06/*10,03	6,06/*10,03	8,75/*10,59	3,86/*9,39	5,93/*8,12	2,76/*6,38	4,42/*6,62
-2	*8,86/*9,79	8,86/*9,79	*12,50/*13,79	6,13/*13,79	8,78/*10,81	3,88/*9,42	5,93/*8,40	2,77/*6,39	4,43/*6,86
-3			*12,96/*14,42	6,25/*14,42	8,87/*10,70	3,95/*9,51	6,00/*8,39	2,82/*6,45	

OPTION

Arti boom

Arm : 2,6 m

Bucket : SAE 0,76 m³ (CECE 0,66 m³)

Unit : 1.000 kg

Lifting conditions : Free on wheels / Dozer blade or Outriggers on ground

A(m)	2	3	4	5	6	7	8	Max. Reach	
									A(m)
B(m)									
8								*2,26/*2,57	*2,26/*2,57
7					*2,35/*2,68	*2,35/*2,68		*2,36/*2,62	*2,36/*2,62
6					*2,32/*2,65	*2,32/*2,65		*2,32/*2,58	1,97/*2,58
5				*2,37/*2,70	*2,37/*2,70	*2,56/*2,91	*2,56/*2,91	*2,77/*3,15	1,94/*3,15
4			*3,28/*3,71	*3,28/*3,71	*3,06/*3,47	*3,06/*3,47	*2,98/*3,38	2,51/*3,38	*3,00/*3,41
3		*6,85/*7,67	*6,85/*7,67	*4,79/*5,39	4,57/*5,39	*3,94/*4,45	3,24/*4,45	*3,53/*4,00	2,40/*4,00
2				*6,37/*7,14	4,26/*7,14	*4,89/*5,50	3,06/*5,50	*4,15/*4,68	2,30/*4,68
1		*5,20/*5,80	*5,20/*5,80	*7,71/*8,63	4,04/*8,63	*5,78/*6,49	2,91/*6,49	4,53/*5,35	2,20/*4,88
0		*6,32/*7,02	6,06/*7,02	*8,67/*9,69	3,91/*9,46	*5,99/*7,31	2,81/*6,44	4,45/*5,95	2,13/*4,80
-1	*5,29/*5,89	*5,29/*5,89	*8,23/*9,12	6,05/*9,12	8,75/*10,37	3,85/*9,39	5,92/*7,91	2,76/*6,37	4,40/*6,44
-2	*7,55/*8,36	*7,55/*8,36	*10,81/*11,94	6,09/*11,94	8,75/*10,74	3,86/*9,39	5,91/*8,30	2,74/*6,36	4,39/*6,76
-3	*10,18/*11,24	*10,18/*11,24	*13,20/*14,68	6,19/*14,68	8,81/*10,78	3,90/*9,45	5,94/*8,42	2,77/*6,39	4,43/*6,84
-4				*8,95/*10,39	4,00/*9,59	6,05/*8,10	2,86/*6,50		

Note 1. Ratings are based on SAE J1097

2. Load point is the hook on the back of the bucket

3. * = Rated loads are based on hydraulic capacity

4. Rated loads do not exceed 87% of hydraulic capacity or 75% of tipping capacity



: Rating over front



: Rating over side or 360 degree



: Ground

Seoul Office

9th Floor. Daewoo Heavy Industries & Machinery Ltd. Bldg.
14-34, Youido-dong, Youngdungpo-gu
150-010, Seoul Korea
Mail: C. P. O Box 7955 Seoul, Korea
Tel. +82 2 2167-3114 Fax +82 2 785-2677
Website: www.dhiltltd.co.kr

Euro Daewoo S. A.

1A Rue Achille Degrâce,
7080 Frameries, Belgium
Tel. +32 65 61 32 30 Fax +32 65 67 73 38

Euro Daewoo France

2/4, Rue Pavlov, Z.I. des Bruyères
78190 Trappes, France
Tel. +33 1 30 16 21 41 Fax +33 1 30 16 21 44

Euro Daewoo UK

Daewoo House Unit 6.3 Nantgarw Park Cardiff
CF4 7QU, U.K.
Tel. +44 1443 842273 Fax +44 1443 841933

Daewoo Maschinen Vertriebs GmbH

Hans-Böckler-Str. 27-29
40764 Langenfeld, Germany
Tel. +49 2173 8509 18 Fax +49 2173 8509 45
Website: www.daewoobaumaschinen.de



The illustrations do not necessarily show the product in standard version. All products and equipments are not available in all markets.
Materials and specifications are subjects to change without prior notice.